

GE Digital Energy

Power Quality

# Digital Energy™

## Uninterruptible Power Supplies

### Product Overview



GE Imagination at work



## UPS Systems – 1Phase

### Structured Cable Applications- IT Networks & Critical Process

VCL SERIES		
Line Interactive Topology, Automatic Voltage Regulation, Step-Wave Output with Internal Hot Swappable Batteries.		
<b>Application</b> Point-of-Sale (EPOS), ATMs, Network Peripherals, PCs, Routers, CCTV & Security and Servers		
RATING	VOLTAGE	CERT
800 VA –3 kVA	230 Vac	CE



VCO SERIES		
Voltage & Frequency Independent (VFI) Double Conversion Technology, Rack or Tower.		
<b>Application</b> Servers, Laboratory devices, PCs, Telecom, Light Industrial and Mid-sized Networks		
RATING	VOLTAGE	CERT
1/2/3 kVA	220/230/240 Vac	CE



GT SERIES		
True VFI, On-line Double Conversion, High Performance UPS, Parallel-Ready Technology with Modular Battery and Easy Expansion/Retrofit.		
<b>Application</b> IT Centers, Telecom Equip., Security Systems, Financial Institutions, Fixed and Mobile Voice/Data Transmission		
RATING	VOLTAGE	CERT
5-10 kVA	220/230/240 Vac	CE



LP11 SERIES		
Double Conversion, High Efficiency (up to 97%) and Redundant Parallel Capable, with Galvanic Isolation and GE's Battery Management for Load Security.		
<b>Application</b> Healthcare & Retail Medium Data Networks, Telecom Equipment, Local Site Protection		
RATING	VOLTAGE	CERT
5-10 kVA	220/230/240 Vac	CE



## UPS Systems – 3Phase

### Critical Processing Applications- Data Centers & Critical Operations

TLE SERIES		
99% Efficient UPS with 3-level IGBT Design, eBoost Technology, Transformer less Topology		
<b>Application</b> Data Centers and Other Critical Process Applications		
RATING	VOLTAGE	CERT
225-1000 kVA	380/400/415 Vac	CE



SG SERIES		
99% Efficient UPS with 2-level IGBT design, eBoost Technology, Output Zigzag Transformer		
<b>Application</b> Data Centers, Healthcare Equipment, Broadcast Transmission		
RATING	VOLTAGE	CERT
10-600 kVA	380/400/415 Vac	CE



LP33 SERIES		
IGBT design, Eco mode, Transformer less Topology, Small Footprint		
<b>Application</b> Data Networks, Telecom, Other		
RATING	VOLTAGE	CERT
10-120 kVA	380/400/415 Vac	CE



## eBoost™

### Guaranteed Higher UPS Efficiency

#### What is eBoost?

e = high efficiency (up to 99%)  
 Boost = fast power transfer (<2ms)



Your distributor:



GE Consumer & Industrial  
Power Protection



# Digital Energy™ LP Series UPS

Uninterruptible Power Supply 3 - 30 kVA



GE imagination at work

For more than a century, GE has led the way with innovative technologies and groundbreaking quality initiatives – literally helping to power the world. Along the way, through the development and delivery of state-of-the-art products and uncompromising service, GE has also built a legacy as a leading supplier of critical power solutions.

To bridge the gap between the traditional utility grid and the needs of today's business, GE offers a complete portfolio of critical power products and services, from desktop Uninterruptible Power Supply (UPS) units to engineered power systems, and from basic UPS and battery maintenance to comprehensive service contracts covering every aspect of your power quality and delivery system.

At GE, our goal is simple – to never let power quality stand in the way of our customers' success. That's why GE is committed to continue developing and delivering

## **UPS technology for the digital world**

# The power of GE

GE is a diversified technology and services company dedicated to creating products that make life better from aircraft engines and power generation to financial services, medical imaging, television programming and plastics. GE operates in more than 100 countries and employs more than 315,000 people worldwide.

The company traces its beginnings to Thomas A. Edison, who established Edison Electric Light Company in 1878. In 1892, a merger of Edison General Electric Company and Thomson-Houston Electric Company created General Electric Company. GE is the only company listed in the Dow Jones Industrial Index today that was also included in the original index in 1896.

GE is proud of its impressive track record for introducing leading edge products, accomplishing growth, having strategic customer relationships and a global presence as broad and expansive as its portfolio of products. GE is committed to maintaining a leadership position in all four of its company-wide initiatives (Six Sigma, Globalization, e-Business/Digitization and Services) to achieve maximum results, whilst embracing the values that are at the heart of the business - imagine, solve, build and lead.

## UPS Product Technology

GE is a leader in the field of critical power protection. It's UPS Product Technology business designs, manufactures and delivers premium power quality products and related software products that ensure organisations all over the world enjoy a safe and managed power supply.

Protect your critical power application with a GE UPS – ranging from 350VA to 4MVA. Using state of the art technology GE has developed different UPS with high reliability and maximum application flexibility.

With a GE power solution in place, your mission-critical equipment is protected from any fluctuation in your power source, enabling you to concentrate on your core activities. Leave your critical power needs with GE, a reliable power quality supplier for more than 100 years.







Digital Energy™ LP Series  
Uninterruptible Power Supplies  
3 - 30 kVA

The Digital Energy™ LP Series provide critical power protection for many different applications. The LP Series is easy to install and service, optimised for the office environment. The robust design is also suitable for more traditional, industrial applications. Both the power and reliability of the system can easily be expanded by adding units, creating a redundant system which has no single points of failure. This is achieved by utilising GE's unique Redundant Parallel Architecture™ (RPA™) technology.

Designed as a true VFI (Voltage and Frequency Independent) UPS, the LP Series is an on-line double conversion, intelligent and heavy duty UPS. The VFI concept ensures the highest level of protection, even under the toughest conditions.

## complete range

- **LP 11**  
Single phase input / single phase output  
3, 5, 6, 8, 10 kVA  
(5-10 kVA also available with 3 phase input)
- **LP 31**  
Three phase input / single phase output  
8, 10, 15, 20 kVA
- **LP 33**  
Three phase input / three phase output  
10, 20, 30 kVA

## features & benefits

- Low input current distortion and high input power factor eliminates need for costly filters or oversized generator
- Small footprint and wheels
- Advanced technology enabling silent operation
- High output power factor allows for optimal sizing of UPS
- Low output voltage distortion
- Superior Battery Management
- ECO mode enables automatic energy savings under stable power conditions

## superior battery management

- Automatic battery test, prevents “surprises”
  - Battery calibration test, enables tracking of battery aging
  - Temperature compensation, prevents overcharging
  - Load dependent end-of-discharge voltage and no load shutdown prevents deep discharge of batteries
- *No surprises*  
- *Prevents damage*  
- *Extends life time of batteries*

## full functionality

- Multi-language LCD, easy to use
- Excellent overload behaviour, withstands toughest conditions
- Cold start function (start-up without mains present)
- Manual bypass integrated in UPS
- Equipped with RS232 serial port
- Fits well in office environment
- Frequency converter

## applications

- Computer and data centres
- Call centres
- Manufacturing and process control units
- Medical equipment and healthcare facilities
- Transportation infrastructure
- Security systems
- Financial institutions
- Fixed and mobile voice and data transmission

## options

- SNMP plug in card for integration into networks
- Potential free alarm contacts
- Matching battery packs for extended back up times
- Redundant Parallel Architecture™



# RPA™

## Redundant Parallel Architecture™

GE provides a unique technology called Redundant Parallel Architecture (RPA) that can parallel Uninterruptible Power Supply (UPS) modules with true redundancy. With RPA, there is no need for external electronics or switches to control the UPS modules in the parallel system. One of the UPS modules in the system arbitrarily takes a leadership role, while the other UPS modules have access to all control parameters. If one UPS fails to operate, the load is automatically redistributed among the others. If the lead UPS fails to operate then a different UPS automatically takes on the leadership role. The RPA systems are designed to have no single points of failure, ensuring the highest level of power protection for critical loads.



Many other so-called redundant UPS offerings have one critical shortfall, in that they have critical components that are not redundant. RPA technology provides complete redundancy of all critical components and there are no single points of failure. RPA technology allows UPS system expansion not only to increase capacity but also to improve the reliability of the power provided to critical loads. For mission critical applications, RPA technology provides true redundancy for the highest reliability.

- **RPA Configuration** provides complete redundancy of all critical components and allows paralleling of up to four units for increased load capacity. It ensures excellent dynamic behaviour based on output voltage load sharing. This provides the highest reliability and availability for mission-critical applications
- **Modular design** allows for system upgrades to meet future power needs without any interruption to the critical load or transfer to bypass
- **Easy to install and maintain**
- **Scaleable** design allows for **efficient use of capital**
- **Peer-to-Peer architecture** where any UPS can be the “logic leader” ensuring **no single points of failure**



# Connectivity solutions

## GE Data Protection

### Power Diagnostics

With GE's Power Diagnostics it is possible to combine the remote monitoring and diagnostic core product IRIS web and dedicated services in a comprehensive solution to minimize risk and maintenance costs. 24x7 UPS monitoring, regular operational status reports, immediate alerting for alarms and critical events via SMS, e-mail, fax are just some of the characteristics of the RM&D solution. In particular the system is scalable and can be easily adapted to various configurations, while remaining safe through a multi-level security system.

### Features

#### Data transmission

- Data download from GE UPS and 3rd party UPS, via IRIS communication, to GE power diagnostic centre
- Data collection of status values, settings and alarm & event logs
- Alarms and other critical events will be submitted automatically on event, all other values on a regular base (standard weekly)

#### Data analysis

- Analysis of available data downloaded from UPS
- Analysis of critical situations, identifying critical trends
- Validating importance and priorities
- Generating status reports
- Preparing maintenance recommendation based on data analysis
- Information will be submitted to client via SMS, email or fax

#### Emergency information

- Informing customer about critical situation and faults
- Data are transmitted automatically from UPS to GE power diagnostic centre
- Immediate information sent via SMS, fax, email

#### E-Dispatching, intervention

- Send emergency information to local service organisation
- Co-ordination with client to inform that people arrive onsite
- Local service teams will be activated and sent to client site

IRIS offers various communication possibilities: normal phone line, GPRS or SNMP communication, flexible for every requirement.

#### Analogue/ISDN modem


- Efficient solution without GPRS functionality using InterLink 2.0 analog
- Can be connected to the UPS during normal UPS operation without any risk
- Less installation time due to an integrated modem

#### GPRS


- The best and most efficient solution using InterLink 2.0 GPRS
- Can be connected to the UPS during normal UPS operation without any risk
- Ready to work after connection to UPS and mounting of antenna and power supply
- Best solution where only a small number of UPS are installed on the same site

#### SNMP gateway server

- Efficient solution for several UPS on the same site or connected with the same Intranet over SNMP
- Using existing customer intranet and requires an internet connection
- SNMP gateway server will be installed locally to communicate with SNMP cards of UPS
- Secure communication over VPN

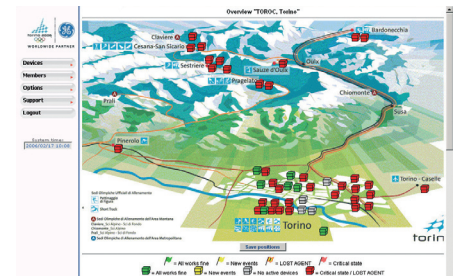

Graphical status overview

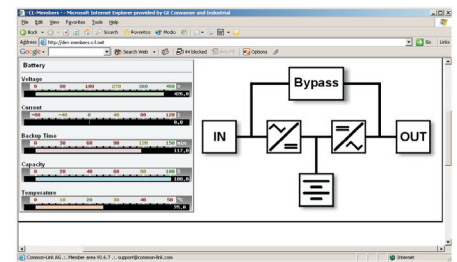

UPS values

# technical specifications

Model	LP 3-11	LP 5-11/ LP 5-31T	LP 6-11/ LP 6-31T	LP 8-11/ LP 8-31T	LP 10-11/ LP 10-31T	LP 8-31	LP 10-31	LP 15-31	LP 20-31	LP 10-33	LP 20-33	LP 30-33			
Rating (kVA / kW)	3/2.4	5/4	6/4.8	8/6.4	10/8	8/6.4	10/8	15/12	20/16	10/10	20/20	30/30			
Battery (V/Ah)	144/7	240/7	240/7	240/12	240/12	2x240/7	2x240/7	2x240/14	2x240/14	2x240/7	2x240/14	2x240/21			
Typical backup time 50 / 100% load (min.)	25/10	25/10	20/8	29/11	22/8	35/14	25/10	30/13	25/10	26/10	26/10	26/10			
Enclosure	A	A/B*	A/B*	C/D*	C/D*	E	E	E	E	F	F	G			
Net weight incl. batt. (kg)	85	110/180*	115/185*	165/270*	170/275*	240	240	345	350	247	372	520			
Input voltage (Vac)	172-285	172-285/ 340-470*	172-285/ 340-470*	172-285/ 340-470*	172-285/ 340-470*	300-470	300-470	300-470	300-470	324-478	324-478	324-478			
Input power factor	.99	.99	.99	.99	.99	.95	.95	.95	.95	.98	.98	.98			
Input frequency (Hz)	40-70	40-70	40-70	40-70	40-70	45-65	45-65	45-65	45-65	45-65	45-65	45-65			
Output voltage (Vac)	220/230/240 (user selectable)									380/400/415 (user selectable)					
Output voltage regulation	+/- 1%														
Output frequency (Hz)	50/60														
Environment	IP20 (IEC 60529)														
Humidity	95% non-condensing														
Ambient operating temperature	0 - 40 °C (32 - 104 °F)														
Audible noise	40-55 dB(A) load and temperature dependent														
Standards safety	EN 50091-1; EN 60950; IEC 950														
Protection degree	IP20														
Standards EMC	EN 50091-2 / IEC 62040-2														
ECO mode	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
SBM**	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
Boost charging	✓	✓	✓	✓	✓										
Potential free contacts	optional	optional	optional	optional	optional	✓	✓	✓	✓	✓	✓	✓			
RS232	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
RPA (optional)	✓	✓	✓	✓	✓					✓	✓	✓			
Plug-in SNMP card (optional)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
Battery extension (optional)		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
Backfeed protection	optional	optional/✓*	optional/✓*	-/✓*	-/✓*	✓	✓	✓	✓	✓	✓	✓			
Separate bypass input						✓	✓	✓	✓	optional	optional	optional			
JUMP DataShield™	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
JUMP Manager™ (optional)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			
IRIS (optional)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓			

## enclosures (h x w x d, mm)

A: 537 x 313 x 590    D: 995 x 313 x 720    G: 1310 x 660 x 780  
 B: 855 x 313 x 590    E: 1190 x 410 x 890  
 C: 680 x 313 x 720    F: 1310 x 500 x 780

LPX-11 = Single phase in/single phase out

LPX-31 = Three phase in/single phase out

LPX-33 = Three phase in/three phase out

X = kVA rating


T = Transformer

\* = LP-11/ LP-31T respectively

\*\* = Superior Battery Management

Specifications subject to change without prior notice

your distributor:



GE Consumer & Industrial SA  
 Via Cantonale 50  
 6595 Riazzino (Locarno)  
 Switzerland  
 T +41 (0) 91 850 51 51  
 F +41 (0) 91 850 51 44  
 E gedinfo@ge.com

Visit us online at:  
[www.gedigitalenergy.com](http://www.gedigitalenergy.com)



GE imagination at work