

VTM SERIES-General Purpose

VTM 2-2000 (2V2000AH)


Specification

Nomial Voltage	2V	
Nomial Capacity(10HR)	2000.0AH	
Dimension	Length	490±3mm (19.29 inches)
	Width	350±3mm (13.78 inches)
	Container Height	339±3mm (13.35 inches)
	Total Height (with Terminal)	349±3mm (13.74 inches)
Approx Weight	Approx 116.0Kg (255.8 lbs)	
Terminal	T11	
Container Material	ABS	
Rated Capacity	2100.0 AH/105.0A	(20hr ,1.80V/cell,25°C/77°F)
	2000.0 AH/200.0A	(10hr,1.80V/cell,25°C/77°F)
	1710.0 AH/342.0A	(5hr,1.75V/cell,25°C/77°F)
	1500.0 AH/500.0A	(3hr,1.75V/cell,25°C/77°F)
	1200.0 AH/1200.0A	(1hr,1.60V/cell,25°C/77°F)
Max. Discharge Current	16000A (5s)	
Internal Resistance	Approx 0.28mΩ	
Operating Temp.Range	Discharge : -15~50°C (5~122°F)	
	Charge : 0~40°C (32~104°F)	
	Storage : -15~40°C (5~104°F)	
Nominal Operating Temp. Range	25±3°C (77±5°F)	
Cycle Use	Initial Charging Current less than 600.0A.Voltage	
	2.4V~2.5V at 25°C(77°F)Temp. Coefficient -5mV/°C	
Standby Use	No limit on Initial Charging Current Voltage	
	2.25V~2.3V at 25°C(77°F)Temp. Coefficient -3mV/°C	
Capacity affected by Temperature	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%



Applications

- ◆ Tele-communication central station (wired or cellular)
- ◆ Power system communication, military communication, etc.
- ◆ Network communication including: data transmission, television signal transmission, etc.
- ◆ Uninterruptable Power System (UPS- for Telecom)

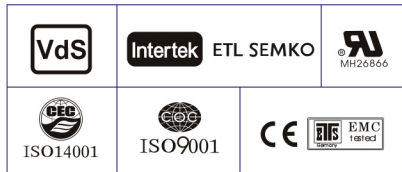

Constant Current Discharge (Amperes) at 25 °C (77°F)



F.V/Time	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	1337.0	1085.9	886.4	594.0	454.0	366.0	313.3	275.7	223.5	191.0	101.3
1.80V/cell	1469.1	1167.9	944.2	625.0	492.0	378.5	326.0	287.3	234.3	200.0	105.0
1.75V/cell	1598.0	1264.1	1016.1	663.0	500.0	399.5	342.0	301.0	240.3	204.0	106.4
1.70V/cell	1736.4	1350.3	1075.6	700.0	522.0	416.0	355.8	311.7	248.0	209.0	108.6
1.65V/cell	1819.4	1403.6	1117.7	723.0	538.7	428.5	365.6	317.3	252.5	212.4	110.4
1.60V/cell	/	1518.2	1200.0	759.0	561.3	446.5	382.6	331.3	262.0	219.2	113.8

Constant Power Discharge (Watts) at 25 °C (77°F)


F.V/Time	30min	45min	1h	2h	3h	4h	5h	6h	8h	10h	20h
1.85V/cell	2561.7	2098.2	1718.7	1159.5	889.5	719.3	617.4	544.7	443.5	379.9	201.7
1.80V/cell	2771.9	2239.1	1821.1	1211.9	958.5	739.9	639.4	565.5	463.5	397.2	208.7
1.75V/cell	2990.4	2400.6	1950.6	1280.8	970.3	778.2	668.5	590.6	474.2	404.6	211.2
1.70V/cell	3231.4	2554.8	2058.4	1349.5	1011.1	808.8	694.3	610.6	489.1	414.3	215.5
1.65V/cell	3358.3	2631.7	2123.6	1385.7	1038.9	830.0	710.9	619.8	496.7	420.3	218.9
1.60V/cell	/	2831.5	2268.0	1447.7	1077.8	862.2	741.5	645.1	514.3	433.1	225.2

Dimensions


T11 Terminal

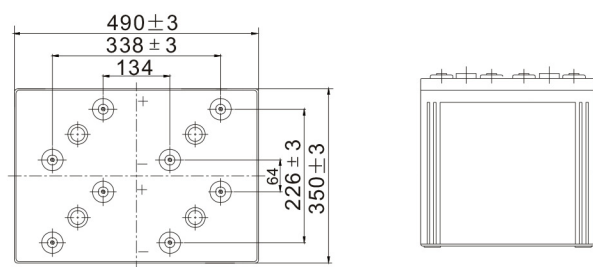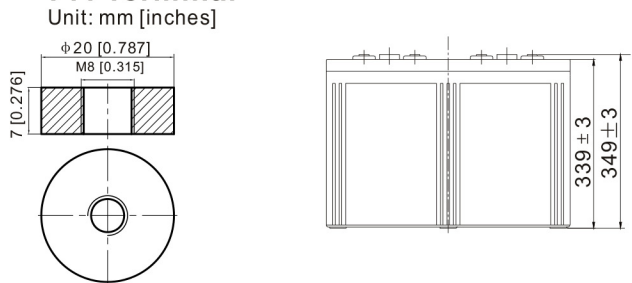


Discharge Characteristics

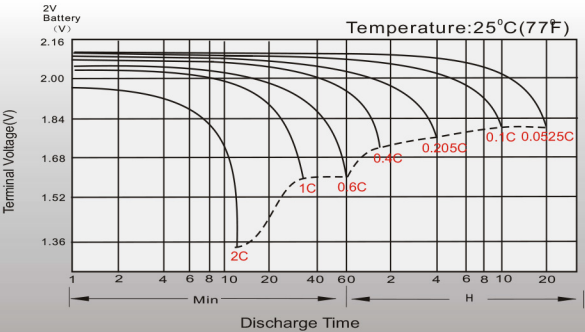


Float Charging Characteristics

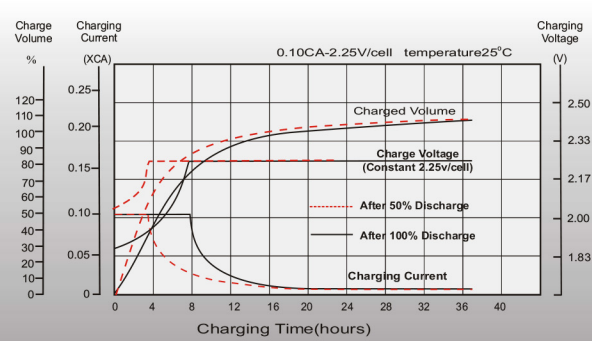


Temperature Effects in Relation to Battery Capacity

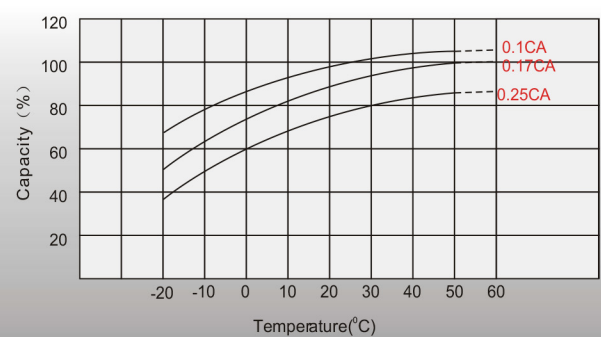


Effect of Temperature on Long Term Float Life

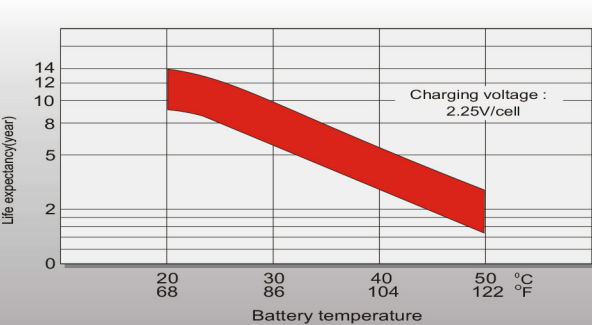

Cycle Life in Relation to Depth of Discharge

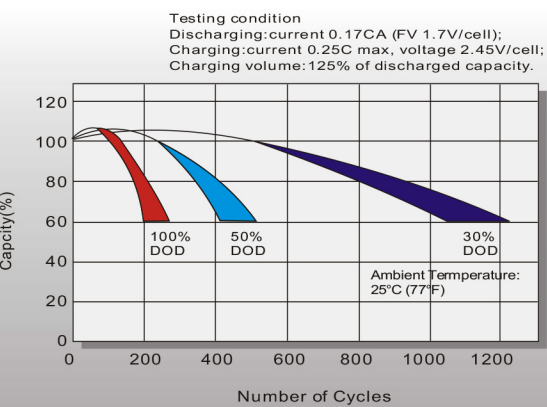

Self Discharge Characteristics

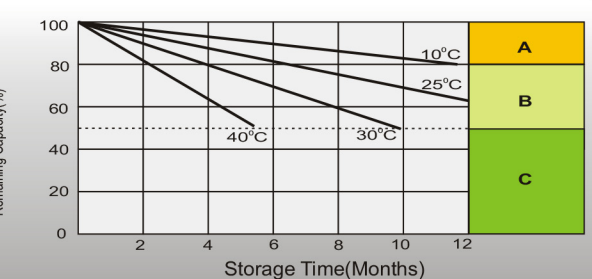

- A** No supplementary charge required
(Carry out supplementary charge before use if 100% capacity is required.)
- B** Supplementary charge required before use. Optional charging way as below:
1. Charged for above 3 days at limited current 0.25CA and constant voltage 2.25V/cell.
2. Charged for above 20 hours at limited current 0.25CA and constant voltage 2.45V/cell.
3. Charged for 8-10 hours at limited current 0.05CA.
- C** Supplementary charge may often fail to recover the capacity.
The battery should never be left standing till this is reached.